

**HAE300W** Series  
DC/DC Converters



# High Performance DC/DC Converters for Harsh Railway and Industrial Environments

## Efficient DC/DC Converters for Industrial, Railway and Challenging Environments

The HAE300W series of DC/DC converters from P-DUKE introduces a substantial increase in output power capacity, reaching up to 300W, all within a compact half-brick design. This series is engineered to fulfill the stringent requirements of industrial and railway (rolling stock) applications.

Featuring a 4:1 input voltage range that spans 9 to 36, 18 to 75, and 40 to 160 Vdc, the HAE300W series is versatile for various power systems across different regions. It also offers a broad selection of output voltage options, including 5, 12, 15, 24, 28, 48, and 54 Vdc, with an adjustable output range of +10% to -20% using an external resistor.

Equipped with multiple protective features, the HAE300W series ensures system safety with over-current protection (hiccup mode), output over-voltage protection (hiccup mode), continuous and auto-recovery output short-circuit protection, input under-voltage lockout, output remote sensing, and remote control capabilities. It is certified to comply with industry standards such as IEC/EN/UL62368-1, EN 50155, and EN 45545.

Built to endure harsh environments and demanding conditions in railway and industrial sectors, the HAE300W series meets MIL-STD 810F and EN 61373 standards for vibration and mechanical shock, and is operable at altitudes up to 5000 meters. This makes it an excellent choice for powering electronic devices in rolling stock, offering high reliability and stability.

### Features

- 300W Output Power
- 4:1 Wide Input Range: 9-36, 18-75, and 40-160Vdc
- Output Voltage: 5, 12, 15, 24, 28, 48, and 54Vdc
- No Minimum Load Required
- 3000Vac Reinforced Insulation for 110Vin
- 2250Vdc Basic Insulation for 24 and 48Vin
- 5000m Operating Altitude
- EN 50155, IEC/UL/EN 62368-1 Safety Approval <sup>\*pending</sup>
- 3 Years Product Warranty

### Applications

- Train Control and Management Systems (TCMS)
- Passenger Information Systems
- Lighting systems in train cars
- Air conditioning and ventilation control units
- Robotic arms and industrial robots
- Programmable Logic Controllers (PLCs)
- Human-Machine Interfaces (HMIs)



1/2 Brick Product Portfolio

### 【お問い合わせ先】

**JEMCO** 株式会社ジェムコ  
 大阪本社 TEL : 06-6338-8566  
 東京 TEL : 080-6449-9194  
 名古屋 TEL : 0587-96-1970  
 URL : <http://www.jemc.co.jp/>  
 E-Mail : [inf@jemc.co.jp](mailto:inf@jemc.co.jp)



# P-DUKE POWER


## HAE300W Series

Half-Brick DC-DC Converter  
Up to 300 Watts

**3**  
YEARS  
WARRANTY

ROHS  
COMPLIANT

REACH  
COMPLIANT

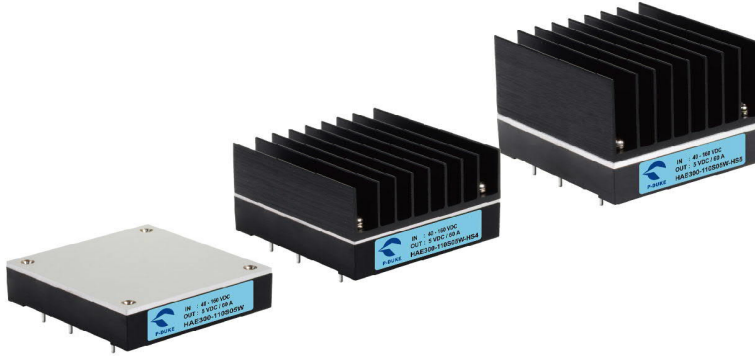

Railway



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



**3000 VAC**  
Reinforced  
Insulation

**3000 VDC**  
Isolation  
Voltage

**4 : 1**  
Wide  
Input  
Range

**NO**  
Min. Load  
Required

**REMOTE**  
**ON**  
**OFF**

**OCP**

**OTP**

**OVP**

**SCP**

**UVP**

### PART NUMBER STRUCTURE

DIP Type:

Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range	Ctrl and Pin Options	Assembly Options
HAE300-	<b>48</b>	<b>S</b>	<b>05</b>	<b>W</b>	<b>P</b>	<b>HS4</b>
	24:9~36 48:18~75 110:40~160	S:Single	05:5 12:12 15:15 24:24 28:28 48:48 54:54	4:1	□:Negative logic P:Positive logic	□: None <b>Heat-sink type</b> HS4: 7GA0127P01-F; H=0.65" HS5: 7GA0128P01-F; H=1" <b>Through hole type</b> TH: No thread *The module can't equip Heat-sink with TH option.

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	A	mA	%	μF
HAE300-24S05W	9 ~ 36	5	60	85	88	108000
HAE300-24S12W	9 ~ 36	12	25	85	91	19150
HAE300-24S15W	9 ~ 36	15	20	85	91	12000
HAE300-24S24W	9 ~ 36	24	12.5	85	91	4800
HAE300-24S28W	9 ~ 36	28	10.7	85	91	3450
HAE300-24S48W	9 ~ 36	48	6.2	85	89	1250
HAE300-24S54W	9 ~ 36	54	5.6	85	89	930
HAE300-48S05W	18 ~ 75	5	60	45	90	108000
HAE300-48S12W	18 ~ 75	12	25	45	92	19150
HAE300-48S15W	18 ~ 75	15	20	45	91	12000
HAE300-48S24W	18 ~ 75	24	12.5	45	92.5	4800
HAE300-48S28W	18 ~ 75	28	10.7	45	92.5	3450
HAE300-48S48W	18 ~ 75	48	6.2	45	89	1250
HAE300-48S54W	40 ~ 160	54	5.6	45	89	930
HAE300-110S05W	40 ~ 160	5	60	20	88	108000
HAE300-110S12W	40 ~ 160	12	25	20	91	19150
HAE300-110S15W	40 ~ 160	15	20	20	91	12000
HAE300-110S24W	40 ~ 160	24	12.5	20	90	4800
HAE300-110S28W	40 ~ 160	28	10.7	20	90	3450
HAE300-110S48W	40 ~ 160	48	6.2	20	90	1250
HAE300-110S54W	40 ~ 160	54	5.6	20	90	930

INPUT SPECIFICATIONS							
Parameter	Conditions			Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom)			9	24	36	VDC
	48Vin(nom)			18	48	75	
	110Vin(nom)			40	110	160	
Start up voltage	24Vin(nom)					9	VDC
	48Vin(nom)					18	
	110Vin(nom)					40	
Shutdown voltage	24Vin(nom)			7.2	7.7	8.3	VDC
	48Vin(nom)			15.0	16.0	17.0	
	110Vin(nom)			32.0	34.0	35.8	
Start up time	Constant resistive load	Power up		85			ms
Input surge voltage	1 second, max.	Remote ON/OFF			85		
		24Vin(nom)				50	VDC
		48Vin(nom)				100	
110Vin(nom)				185			
Input filter <sup>(1)</sup>	Pi type						
Remote ON/OFF	Referred to -Vin pin	Negative logic (Standard)	DC-DC ON	Short or 0 ~ 1.2VDC			
			DC-DC OFF	Open or 3 ~ 12 VDC			
		Positive logic (Option)	DC-DC ON	Open or 3 ~ 12 VDC			
			DC-DC OFF	Short or 0 ~ 1.2VDC			
		Input current of Ctrl pin		-0.5		+1.0	mA
		Remote off input current			3		mA

OUTPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load		-0.1		+0.1	%
Load regulation	No Load to Full Load		-0.1		+0.1	%
Voltage adjustability	Maximum output deviation is inclusive of remote sense		-20		+10	%
Remote sense	% of Vout(nom) If remote sense is not being used, Sense pins should be connected to corresponding polarity OUTPUT pins.				10	%
Ripple and noise	Measured by 20MHz bandwidth With a 22µF/25V X7R MLCC and a 22µF/25V SP-CAP 5Vout With a 22µF/25V X7R MLCC and a 22µF/25V SP-CAP 12Vout, 15Vout With a 4.7µF/50V X7R MLCC 24Vout, 28Vout With a 2.2µF/100V X7R MLCC 48Vout, 54Vout			100 125 200 300		mVp-p
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			200	250	µs
Over voltage protection	% of Vout(nom); Hiccup mode		115		140	%
Over load protection	% of Iout rated; Hiccup mode		120		150	%
Short circuit protection			Continuous, automatic recovery			

GENERAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute (Reinforced insulation)	110Vin(nom) Input to Output Input (Output) to Case	3000 1500			VAC
	1 minute	Others Input to Output Input (Output) to Case	3000 1600			VDC
Isolation resistance	500VDC		1			GΩ
Isolation capacitance					2500	pF
Switching frequency			210	250	290	kHz
Safety approvals(Pending)			IEC /EN/ UL62368-1			
Standard approvals(Pending)			EN50155 EN45545-2			
Case material	24Vin(nom) and 48Vin(nom) 110Vin(nom)					Metal Aluminum base-plate with plastic case
Base material	24Vin(nom) and 48Vin(nom)					FR4 PCB
Potting material						Silicone (UL94 V-0)
Weight						105g (3.70oz)
MTBF	MIL-HDBK-217F, Full load					5.198 x10 <sup>5</sup> hrs

ENVIRONMENTAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating case temperature	Base-plate		-40		+105	°C
Maximum case temperature					105	°C
Over temperature protection				115		°C
Storage temperature range			-55		+125	°C
Thermal impedance	Module without assembly option			6.1		°C/W
	Only mount on the iron base-plate			2.7		
	Heat-sink type with 0.65" Height			3.2		
	Heat-sink type with 1" Height			2.5		
Thermal shock						MIL-STD-810F
Shock						EN61373, MIL-STD-810F
Vibration						EN61373, MIL-STD-810F
Relative humidity						5% to 95% RH


EMC SPECIFICATIONS		
Parameter	Conditions	Level
EMI	EN55032, EN50121-3-2 with external components  *Connecting four screw bolts to shield plane will help to reduce the EMI.	Class A, Class B
EMS	EN55035, EN50121-3-2	
ESD	EN61000-4-2 Air $\pm$ 8kV and Contact $\pm$ 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 20V/m	Perf. Criteria A
Fast transient	EN61000-4-4 $\pm$ 2kV HAE300-24S□□W With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220 $\mu$ F/100V) and a TVS(SMDJ58A, 58V, 3000Watt peak pulse power) in parallel. HAE300-48S□□W With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220 $\mu$ F/100V) and a TVS(SMDJ120A, 120V, 3000Watt peak pulse power) in parallel. HAE300-110S□□W With 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KXJ series, 150 $\mu$ F/200V) and a TVS(SMDJ170A, 170V, 3000Watt peak pulse power) in parallel.	Perf. Criteria A
Surge	EN61000-4-5 $\pm$ 2kV HAE300-24S□□W With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220 $\mu$ F/100V) and a TVS(SMDJ58A, 58V, 3000Watt peak pulse power) in parallel. HAE300-48S□□W With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220 $\mu$ F/100V) and a TVS(SMDJ120A, 120V, 3000Watt peak pulse power) in parallel. HAE300-110S□□W With 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KXJ series, 150 $\mu$ F/200V) and a TVS(SMDJ170A, 170V, 3000Watt peak pulse power) in parallel.	Perf. Criteria A
Conducted immunity	EN61000-4-6 10Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

**Note:**


- Input source impedance: The power module will operate as specifications without external components, assuming that the source voltage has a very low impedance and reasonable input voltage regulation. Highly inductive source impedances can affect the stability of the power module. Since real-world voltage source has finite impedance, performance can be improved by adding external filter capacitor. The HAE300-24S□□W and HAE300-48S□□W recommended Nippon Chemi-con KY series, 220 $\mu$ F/100V. The HAE300-110S□□W recommended Chemi-con KXJ series, 150 $\mu$ F/200V.

**CAUTION:** This power module is not internally fused. An input line fuse must always be used.


**CHARACTERISTIC CURVE**

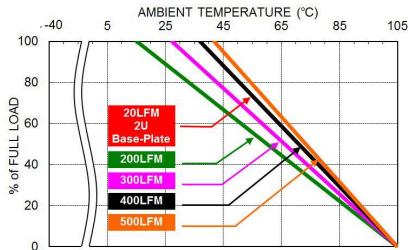


HAE300-48S12W Derating Curve  
(See Thermal Considerations)

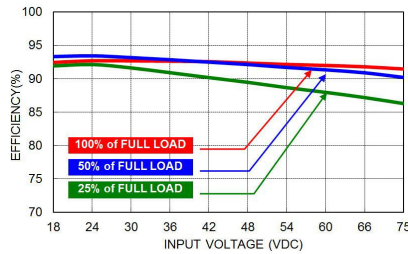

Efficiency vs. Input Voltage

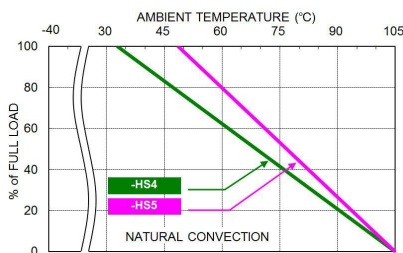

HAE300-48S12W Derating Curve with Heat-sink  
(See Thermal Considerations)

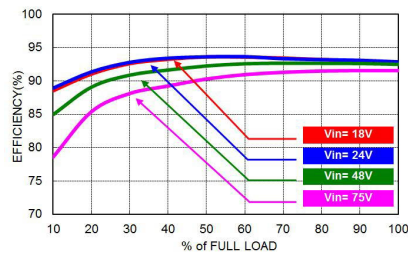

Efficiency vs. Output Load

**FUSE CONSIDERATION**

This power module is not internally fused. An input line fuse must always be used.


This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :


Model	Fuse Rating (A)	Fuse Type
HAE300-24S□□W	50	Fast-Acting
HAE300-48S□□W	25	Fast-Acting
HAE300-110S□□W	12	Fast-Acting

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

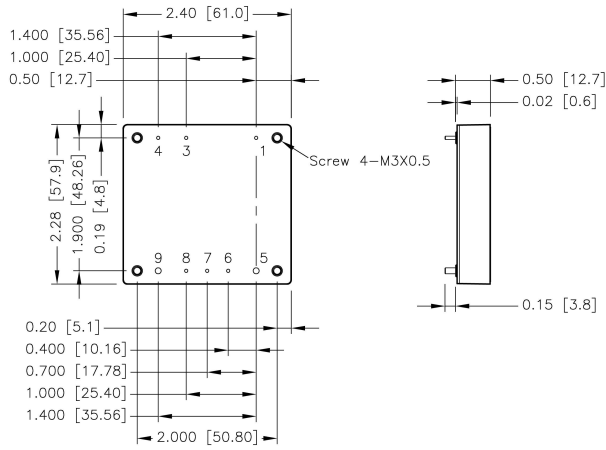**MECHANICAL DRAWING**
**HAE300-24S□□W, HAE300-48S□□W**


BOTTOM VIEW

■ The screw locked torque: MAX 5.0kgf-cm/0.49N-m

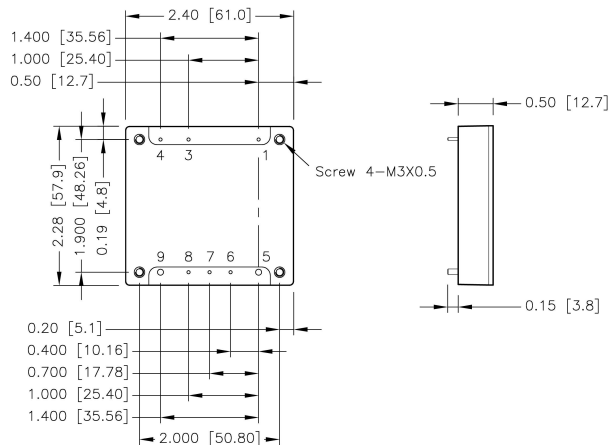**HAE300-110S□□W**


BOTTOM VIEW


■ The screw locked torque: MAX 3.5kgf-cm/0.34N-m

**PIN CONNECTION**

PIN	DEFINE	DIAMETER
1	-Vin	0.04 Inch
3	Ctrl	0.04 Inch
4	+Vin	0.04 Inch
5	-Vout	0.08 Inch
6	-Sense	0.04 Inch
7	Trim	0.04 Inch
8	+Sense	0.04 Inch
9	+Vout	0.08 Inch

- All dimensions in inch [mm]
- Tolerance :x.xx±0.02 [x.x±0.5]  
x.xxx±0.01 [x.xx±0.25]
- Pin dimension tolerance ±0.004[0.10]

**RECOMMENDED PAD LAYOUT**

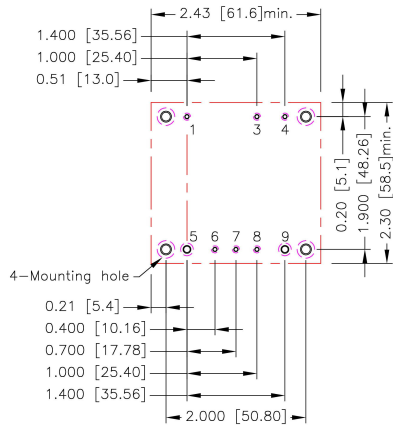


All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Through hole 1,3,4,6,7,8:  $\Phi 0.051[1.30]$   
 Through hole 5,9:  $\Phi 0.091[2.30]$   
 Through hole of mounting:  $\Phi 0.126[3.20]$   
 Top view pad 1,3,4,6,7,8:  $\Phi 0.064[1.63]$   
 Top view pad 5,9:  $\Phi 0.113[2.88]$   
 Top view pad of mounting:  $\Phi 0.157[4.00]$   
 Bottom view pad 1,3,4,6,7,8:  $\Phi 0.102[2.60]$   
 Bottom view pad 5,9:  $\Phi 0.181[4.60]$   
 Bottom view pad of mounting:  $\Phi 0.252[6.40]$



## THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this temperature to a lower value for extremely high reliability.



- Thermal test condition with vertical direction by natural convection (20LFM).
- The iron base-plate dimension is 19" X 3.5" X 0.063" (The height is EIA standard 2U).
- The heat-sink is optional and P/N: 7GA0127P01-F, 7GA0128P01-F.

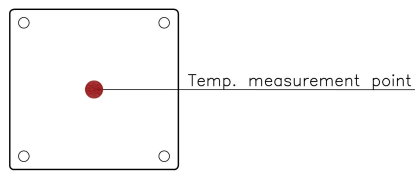

BASE PLATE



## HEAT-SINK TYPE OPTIONS

HAE300-□□S□□W -HS4  
7GA0127P01-F



SIDE VIEW

HAE300-□□S□□W -HS5  
7GA0128P01-F



SIDE VIEW

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]  
x.xxx±0.01 [x.xx±0.25]

## OUTPUT VOLTAGE ADJUSTMENT

Output voltage is adjustable for 10% trim up or -20% trim down of nominal output voltage by connecting an external resistor between the Trim pin and either the +Sense or -Sense pins.

With an external resistor between the Trim and -Sense pin, the output voltage set point increases.

With an external resistor between the Trim and +Sense pin, the output voltage set point decreases.

Maximum output deviation is +10% inclusive of remote sense.

The external Trim resistor needs to be at least 1/8W of rated power.

### Trim Up Equation

$$R_U = \left[ \frac{G \times 2.5}{(V_{o,up} - V_{o,nom})} - H \right] k\Omega$$

### Trim Down Equation

$$R_D = \left[ \frac{(V_{o,down} - 2.5) \times G}{(V_{o,nom} - V_{o,down})} - H \right] k\Omega$$


### Trim Constants

Module	G	H
HAE300-□□S05W	5.1	2
HAE300-□□S12W	10	5.1
HAE300-□□S15W	10	5.1
HAE300-□□S24W	56	13
HAE300-□□S28W	56	13
HAE300-□□S48W	66	27
HAE300-□□S54W	66	27

### EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



□□S05W		1	2	3	4	5	6	7	8	9	10
ΔV (%)											
Vout (V)		5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
RU (kΩ)		253.00	125.50	83.00	61.75	49.00	40.50	34.43	29.88	26.33	23.50

□□S12W		1	2	3	4	5	6	7	8	9	10
ΔV (%)											
Vout (V)		12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
RU (kΩ)		203.23	99.07	64.34	46.98	36.57	29.62	24.66	20.94	18.05	15.73

□□S15W		1	2	3	4	5	6	7	8	9	10
ΔV (%)											
Vout (V)		15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
RU (kΩ)		161.57	78.23	50.46	36.57	28.23	22.68	18.71	15.73	13.42	11.57

□□S24W		1	2	3	4	5	6	7	8	9	10
ΔV (%)											
Vout (V)		24.240	24.480	24.720	24.960	25.200	25.440	25.680	25.920	26.160	26.400
RU (kΩ)		570.33	278.67	181.44	132.83	103.67	84.22	70.33	59.92	51.81	45.33


□□S28W		1	2	3	4	5	6	7	8	9	10
ΔV (%)											
Vout (V)		28.280	28.560	28.840	29.120	29.400	29.680	29.960	30.240	30.520	30.800
RU (kΩ)		487.00	237.00	153.67	112.00	87.00	70.33	58.43	49.50	42.56	37.00

□□S48W		1	2	3	4	5	6	7	8	9	10
ΔV (%)											
Vout (V)		48.480	48.960	49.440	49.920	50.400	50.880	51.360	51.840	52.320	52.800
RU (kΩ)		316.75	144.88	87.58	58.94	41.75	30.29	22.11	15.97	11.19	7.38

□□S54W		1	2	3	4	5	6	7	8	9	10
ΔV (%)											
Vout (V)		54.540	55.080	55.620	56.160	56.700	57.240	57.780	58.320	58.860	59.400
RU (kΩ)		278.156	125.378	74.452	48.989	33.711	23.526	16.65	11.19	6.95	3.56

## OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down



### □□S05W

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
RD (k $\Omega$ )	247.90	120.40	77.90	56.65	43.90	35.40	29.33	24.78	21.23	18.40
$\Delta V$ (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	4.450	4.400	4.350	4.300	4.250	4.200	4.150	4.100	4.050	4.000
RD (k $\Omega$ )	16.08	14.15	12.52	11.11	9.90	8.84	7.90	7.07	6.32	5.65

### □□S12W

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
RD (k $\Omega$ )	776.57	380.73	248.79	182.82	143.23	116.84	98.00	83.86	72.86	64.07
$\Delta V$ (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	10.680	10.560	10.440	10.320	10.200	10.080	9.960	9.840	9.720	9.600
RD (k $\Omega$ )	56.87	50.87	45.80	41.45	37.68	34.38	31.47	28.88	26.57	24.48

### □□S15W

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
RD (k $\Omega$ )	818.23	401.57	262.68	193.23	151.57	123.79	103.95	89.07	77.47	68.23
$\Delta V$ (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	13.350	13.200	13.050	12.900	12.750	12.600	12.450	12.300	12.150	12.000
RD (k $\Omega$ )	60.66	54.34	49.00	44.42	40.46	36.98	33.92	31.20	28.76	26.57

### □□S24W


$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	23.760	23.520	23.280	23.040	22.800	22.560	22.320	22.080	21.840	21.600
RD (k $\Omega$ )	4947.67	2439.33	1603.22	1185.17	934.33	767.11	647.67	558.08	488.41	432.67
$\Delta V$ (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	21.360	21.12	20.88	20.64	20.40	20.16	19.92	19.68	19.44	19.20
RD (k $\Omega$ )	378.06	349.06	316.90	289.33	265.44	244.54	226.10	209.70	195.04	181.83

### □□S28W

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	27.720	27.440	27.160	26.880	26.600	26.320	26.040	25.760	25.480	25.200
RD (k $\Omega$ )	5031.00	2481.00	1631.00	1206.00	951.00	781.00	659.57	568.50	497.67	441.00
$\Delta V$ (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	24.920	24.640	24.360	24.080	23.800	23.520	23.240	22.960	22.680	22.400
RD (k $\Omega$ )	394.64	356.00	323.31	295.29	271.00	249.75	231.00	214.33	199.42	186.00

**OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)**

Trim-down


**□□S48W**

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	47.520	47.04	46.56	46.08	45.60	45.12	44.64	44.16	43.68	43.20
RD (k $\Omega$ )	6163.25	3035.13	1992.42	1471.06	1158.25	949.71	800.75	689.03	602.14	532.63

$\Delta V$ (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	42.720	42.240	41.760	41.280	40.800	40.320	39.840	39.360	38.880	38.400
RD (k $\Omega$ )	475.75	428.35	388.25	353.88	324.08	298.2	275.01	254.54	236.28	219.81

**□□S54W**

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	53.460	52.920	52.380	51.840	51.300	50.760	50.220	49.680	49.140	48.600
RD (k $\Omega$ )	6201.44	3054.22	2005.15	1480.61	1165.89	956.07	806.21	693.81	606.38	536.44

$\Delta V$ (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	48.060	47.520	46.980	46.440	45.900	45.360	44.820	44.280	43.740	43.200
RD (k $\Omega$ )	479.22	431.54	391.19	356.60	326.63	300.40	277.26	256.69	238.29	221.72